



PS-3207U

PS-3207UWg

Wired / Wireless 2 USB 2.0 + 1 Parallel ports Print Server



Broad Selection of Printing Methods

The PS-3207U/UWg print servers support a wide selection of printing protocols such as LPR, IPP, SMB/TCP and RAW printing. They can also work with different network protocols like, TCP/IP, IPX/SPX, NetBEUI, and Apple Talk. This gives you a variety of printing methods to choose from based on your requirements.

Fault-Tolerant Firmware Upgrades

Now, users need not worry about errors occurring in the midst of an upgrade that may subsequently stop its operations. The PS-3207U/UWg print servers incorporate a fault-tolerant upgrade function that permits re-upgrading of the device should problems occur during the initial or previous upgrade session.

Double-purposed DHCP Server/Client

The printer server can act as a DHCP server that lets your LAN clients to automatically obtain an IP address. It can also act as a DHCP client allowing easy integration to your existing network.

Support USB 2.0 High Speed

This print server supports USB 2.0 High Speed which increases the throughput when connected to USB 2.0 printers.

Easy & Multilingual Ezmax Setup Wizard and Utility*

To facilitate connection to your printer the PS-3207U/UWg include a user-friendly EZmax setup wizard. Its easy-to-use windows installation wizard simplifies and enhances driver installation for immediate use of the device. An add-on feature allows you to conveniently configure the print server from any network client that support web-browsing.

* The EZmax Setup CD Wizard only supports Edimax print servers.




FEATURES AND TECHNICAL SPECIFICATIONS

- Complies with IEEE 802.3/802.3u standards, and wireless 802.11b/g standards (PS-3207UWg only)
- Includes multilingual EZmax setup wizard
- Shares 2 USB 2.0 +1 Parallel printers* with network users
- Supports TCP/IP, IPX/SPX, NetBEUI and Apple Talk protocols
- Supports LPR, IPP, SMB/TCP and RAW printing protocols
- Supports DHCP Server and Client protocols
- Supports Auto MDI/MDI-X
- Compatible with Windows 2000/XP/Vista, MAC OS 10.4.x and above

STANDARDS & HARDWARE INTERFACE	CPU / MEMORY	POWER ADAPTER
<ul style="list-style-type: none"> • IEEE802.3 / 802.3u • Wireless 802.11b/g (PS-3207UWg only) • Two USB ports • One Parallel port • One 10/100Mbps LAN port • Reset button • One 2dBi antenna (PS-3207UWg only) 	<ul style="list-style-type: none"> • RISC CPU • 2MB NOR Flash • 16MB SDRAM 	<ul style="list-style-type: none"> • 12VDC / 1A
INSTALLATION & MANAGEMENT KITS	SECURITY	LED Indicators
<ul style="list-style-type: none"> • Multilingual EZmax Setup Wizard • Admin Utility included • Web-based Management • Firmware upgrade utility 	<ul style="list-style-type: none"> • 64/128-bit WEP Encryption, WPA-PSK and WPA2-PSK security (PS-3207UWg only) 	<ul style="list-style-type: none"> PS-3207U <ul style="list-style-type: none"> • Power, Print 1/2/3, LAN PS-3207UWg <ul style="list-style-type: none"> • Power, WLAN, Print 1/2/3, LAN
SYSTEM REQUIREMENTS	OUTPUT POWER	HUMIDITY & TEMPERATURE
<ul style="list-style-type: none"> • CPU: Pentium III 1G above or similar • Memory size : 256MB RAM • One CD-ROM drive • Hard Disk : Min/ of 100MB disk space • USB / Parallel Printer • Wireless 802.11b/g or Fast Ethernet network 	<ul style="list-style-type: none"> • 16dBm - 18dBm (PS-3207UWg only) 	<ul style="list-style-type: none"> • 10~90% (Non-condensing) • 0~55°C
DIMENSIONS	CERTIFICATIONS	
<ul style="list-style-type: none"> • 187 (W) x 30 (H) x 100 (D) mm 	<ul style="list-style-type: none"> • CE, FCC 	

TYPICAL SETUP DIAGRAM AND RELATED PRODUCTS

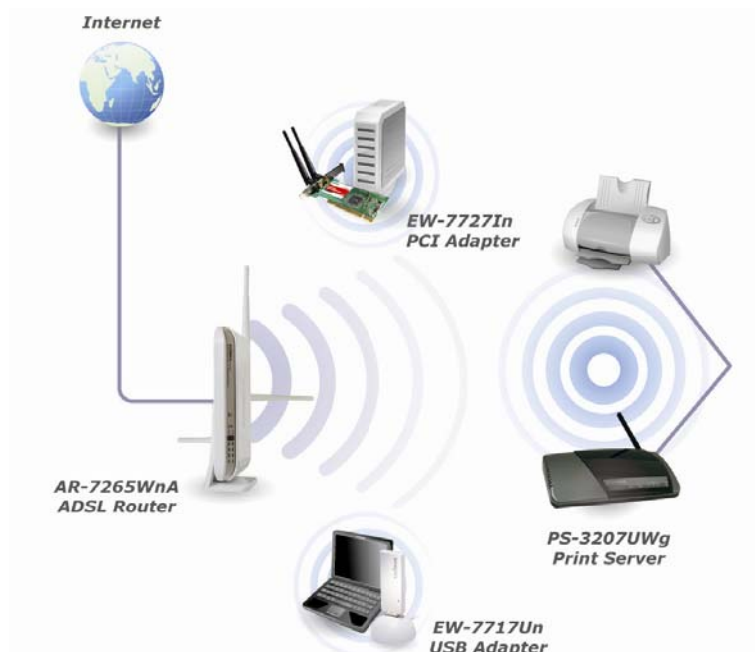

- Please check the list of compatible printers before you make your purchase.
- Product features and specifications are subject to change without notice.